

The background of the entire image is a close-up, high-angle shot of teal-colored water with intricate, concentric ripples and small waves, creating a textured, shimmering effect. The color is a vibrant, slightly dark teal.

OPRUSS

www.opruss.com

OPM250 ANALYZER

(Determinable Parameters **COD, BOD_c, TSS, TOC_c**)



OPM250 is variant specially designed to work extensively with extremely polluted effluent. It has an ability of scanning 180-750nm of light. With convenient features of robust structure, plug and play system and the self automatic cleaning function makes this variant, leader in its comparative class. The extensive use for this variant includes measuring quality indexes in water including COD, BOD and turbidity with a comparatively higher range of individual parameters. Field applications being surface water, industrial waste water, lightly polluted underground water and municipal sewage.

The product variant comes with the AUTOMATICA enabled version and makes itself ideal for working along with industrial utilities for controlling various process subjected to indices of organic pollutants.

The Consumable-less and chemical-free spectral measurement allows a precise determination of the Parameters.

Features:


- Non-corrosive POM PEEK TITANIUM shell
- Built in interference cancellation
- Narrow bandwidth spectral scanning
- Shock proof sensor aperture
- Built in ACSC cleaning
- Adaptability to multiple water matrices
- Grill casing for protection while surface water deployment
- Repetitive Calibration-free, precise measurement. Having its smart system core of repetitive reference technology benefits the repeatable performance of OPM3000 over prolonged period without regular calibration
- Zero effort maintenance-free cleaning system
- No external dependencies for operational or sensor aperture cleaning process

Installation Methods:

- Medium immersed
 - Sites with challenges like a distant medium source from the point of controller mount, this method of installation can be chosen.
 - The analyser being constantly in contact with the medium helps the analyser to never face a dry-off situation
- Extractive
 - Where the sample is allowed to flow and exit the measuring conduit system similar to a standard stationed measuring device. Usually avoids the Constantine medium matrix as the sample with varying quality flows through the analyser rather than a partially stagnant volume of medium to achieve sharp data curves

*Sample extraction accessory is required for this type

OPRUSS AUTOMATICA

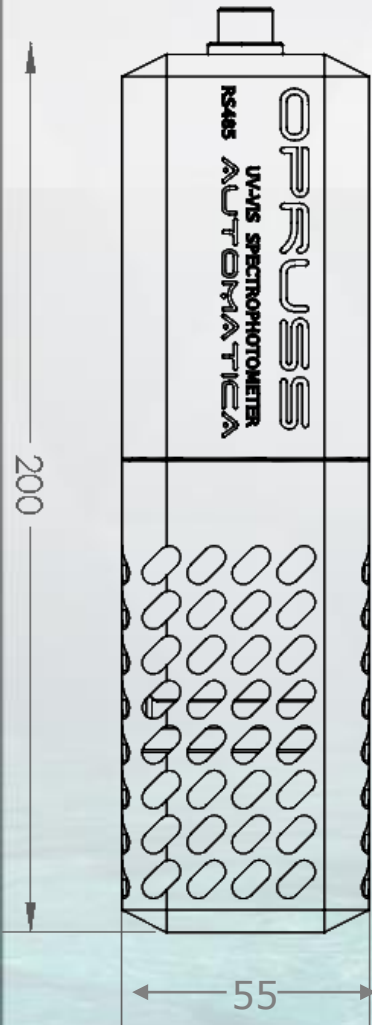

Name	Organic Pollutant Monitor
Model Name	OPM250
Measurement methods	UV + VIS Spectrophotometer (Dual Beam Absorption Spectrophotometry) 180-350nm for Ultraviolet spectrum scanning 320-750nm for Visible spectrum scanning* <small>*Turbidity compensation at overlapping spectral bandwidth</small>
Measurement items	COD, BOD _c , TSS, TOC _c
Measurement range	COD (0-500-3500 mg/l) BOD _c (0-500-3500 mg/l) TSS (0-500-3500 mg/l) TOC _c (0-500-2000mg/l)
Measurement accuracy	Within $\pm 8\%$ of full scale
Measurement Repeat - Ability	Within $\pm 8\%$ of full scale
Measurement Linearity	Within $\pm 8\%$ of full scale
Measurement Stability	Within $\pm 5\%$ of full scale
Measurement interval	T90 Data output within 1 minute
Resolution	0.01mg/L
Calibration	Multi point based automatic calibration. Standard calibration as per factory setting. Local calibration for adaptive environments. For COD compensation with respect to organics and inorganic proportions.
Cable length	10 m standard (Expandable up to 30m)
Sample minimum pressure	1 Bar
Power	230VAC $\pm 10\%$, 50Hz
Output	RS485 Two way communication enabled
Photo incident Source	UV + Vis entire spectral Light incidence
Protection class	Ingress Protection IP68 EMC Conformity with EN61323-1, EN61010-1
Cleaning method	Advanced conductive surface cleaning / Compressed Air Cleaning
MOC	Titanium Quartz POM SS316L
Sensor diagnostics	Onboard Library for diagnostic commands available
Display	Anti-glare LCD Display – Touch Panel Type
Ambient operating Condition	Ambient Temperature 0-55°C Ambient Humidity 90% RH
Storage temperature	5~45°C
Background Data Input	Sample loss input Time correction input Flux Cancellation Input Temperature Compensation Input
Construction	For Outdoor Installation
Color/Finish	Standard Integral material finish as per MOC
Installation Conditions	*Installation guide book to be referred

KEY FEATURES FOR OPM SERIES SENSORS



Accurate and high resolution Realtime measurements



Easy integration – Plug to Run design



Integrated digital display for Realtime Monitoring and Data logging for advanced analytics



**Remarkably Low Maintenance operation.
Built-in Sensor Diagnostics for smart access over sensor performance details via Two Way communication**



Reliable and Robust operation to changing process conditions



Built-in Self-cleaning Mechanism



User Friendly Calibration

BOD

C_3H_6O

COD

TOC

Cr

As

TDS

pH

CH_2O

OH

Cy

NH_3

C_2H_4O

C_3H_8O

CH_3CO

ORP



DDT SMART CONTROLLER

📍 HO PTESPL Mumbai : 104/5, Kingston Tower, Opp. Viva College, Bypass Road, Virar (W) - 401 303, Maharashtra, India.

PTESPL Haryana : K-3, 1001, Ground Floor, Vatika ZNXT, Sector 83, Gurgaon

PTESPL Kolkata : 47, Park Circus Market, Kolkata 700016, West Bengal

☎ 0250-2519494 / 7756979879 ✉ info@ptespl.com 🌐 www.ptespl.com

www.opruss.com

Marketed By

PT
ECOLOGICAL
SERVICES PVT. LTD

Final product may vary with depicted images subjected to origin of requirement to adapt working conditions of the specific location of end user.